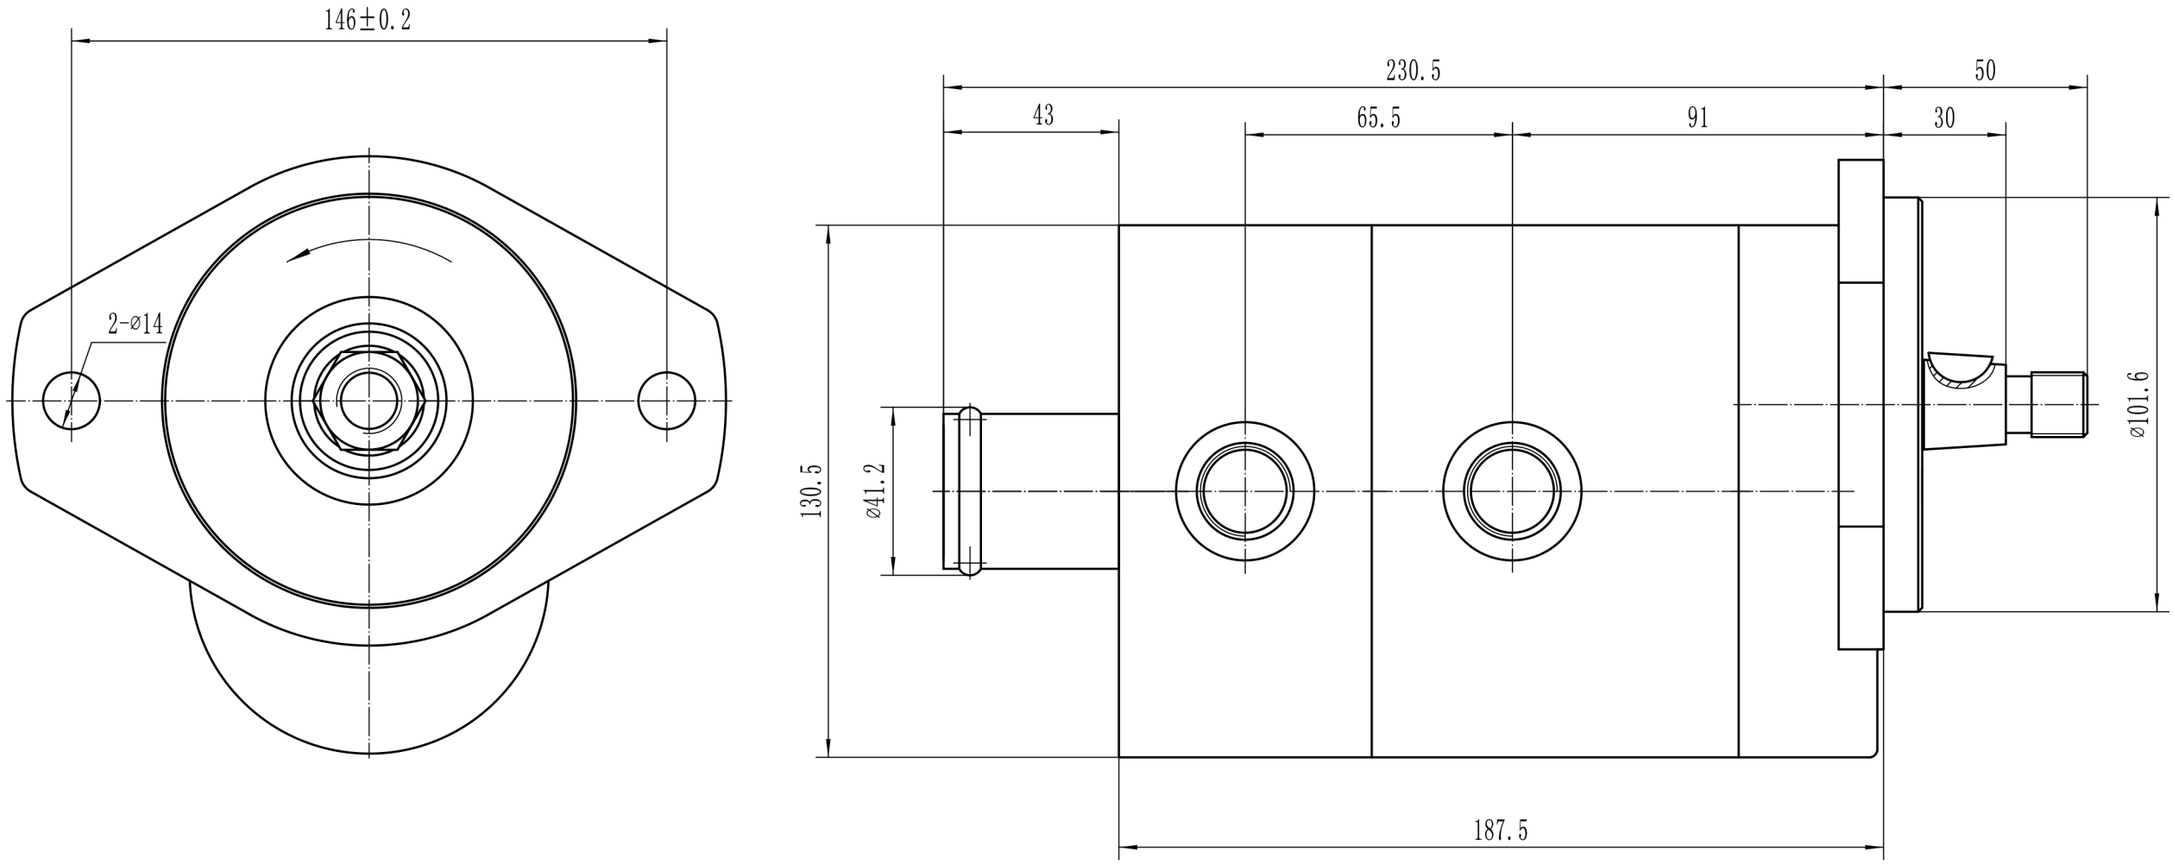

Technical requirements

Nominal displacement (ml/r): 33, 16

Rated pressure (MPa): 20

Rated speed (r/min): 800 - 3000

Rotation direction: Right-handed